


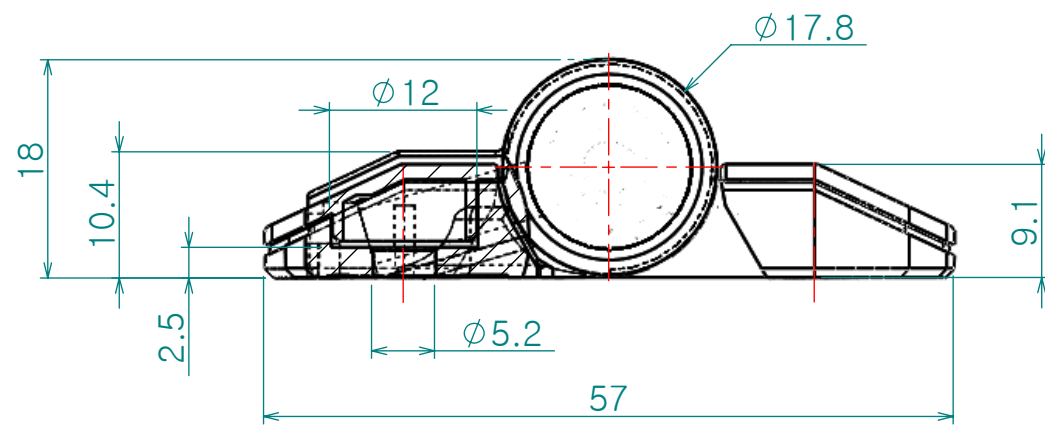
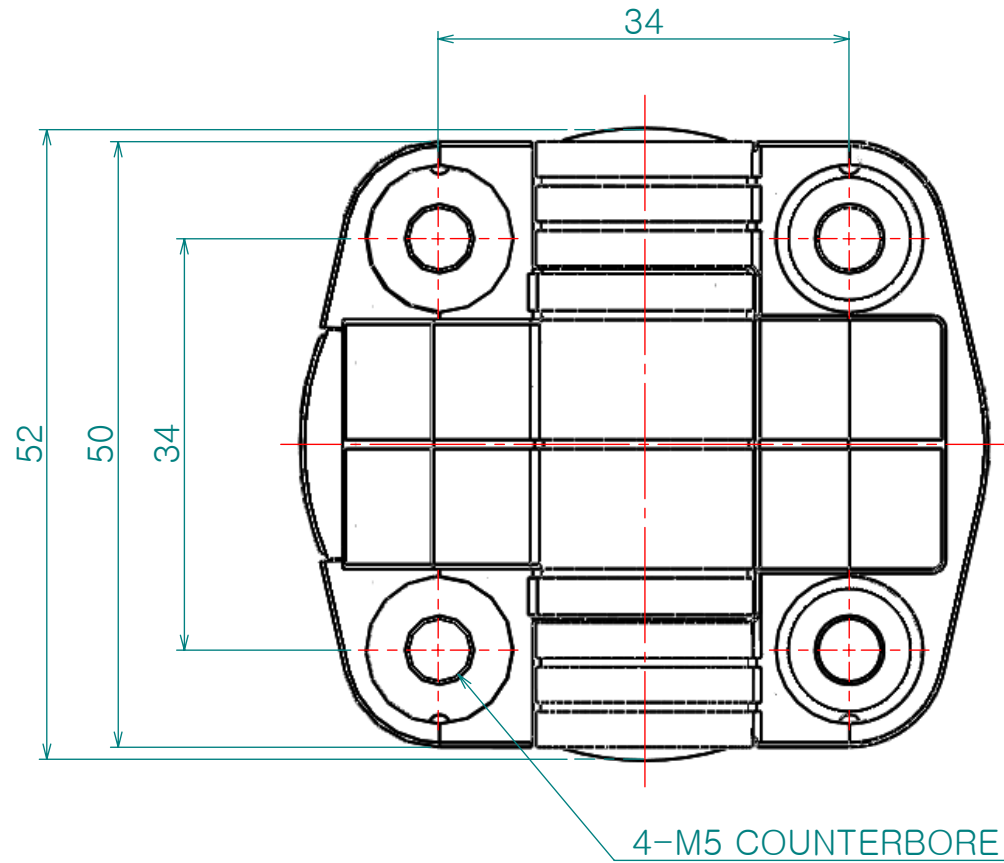
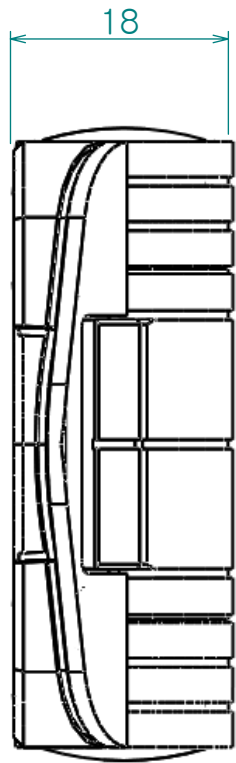


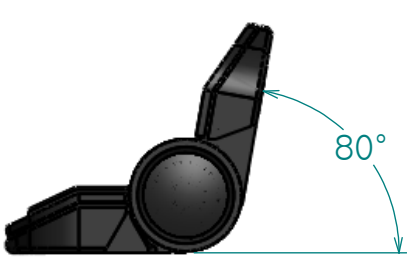


| Re. No. | DESCRIPTION | DATE | DS. | CH. | AP. |
|---------|-------------|------|-----|-----|-----|
| △       |             |      |     |     |     |
| △       |             |      |     |     |     |
| △       |             |      |     |     |     |

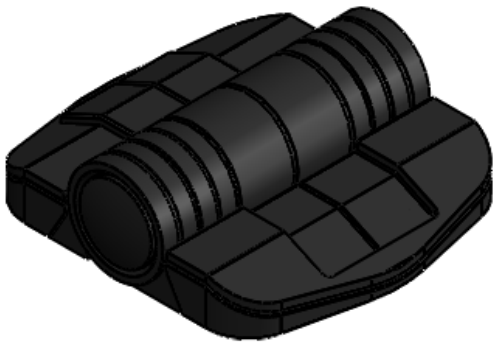

CH-034-80

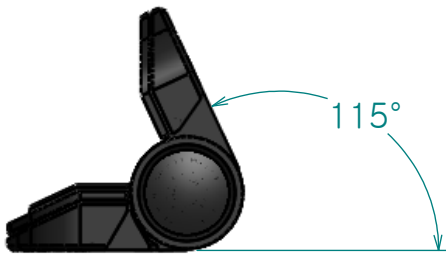

CH-034-115

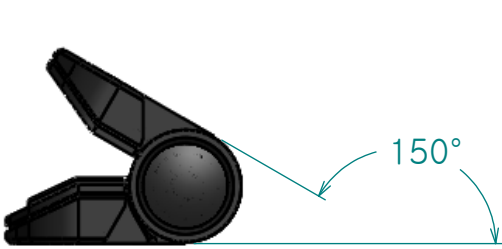

CH-034-150



CH-034-180

※ 토크 위치선이 80°,115°,150° 세가지가 있음.

- Note
- 1. 특징 :
  - 2. 용도 :

|                |           |                               |                                |                             |                |
|----------------|-----------|-------------------------------|--------------------------------|-----------------------------|----------------|
| Dimension (mm) | Precision | Material<br><b>POLYACETAL</b> |                                | Dwg. No.                    | Q'TY           |
| 0.5~3<br>3~6   | ±0.05     | Finish<br><b>BLACK</b>        |                                | Part Name.                  | Weight<br>-    |
| 6~30           | ±0.1      | Revision<br>-                 | Sheet Size<br><b>A3</b>        | Ass'y Name                  | Scale<br>1.6:1 |
| 30~120         | ±0.15     | Date<br>2010-11-03            | Designed by<br><i>Shin S H</i> | Model No.<br><b>CH- 034</b> |                |
| 120~315        | ±0.2      | Checked by                    | Approved by                    |                             |                |
| 315~1000       | ±0.3      | KS B 0412에 준함                 |                                |                             |                |
| 1000~2000      | ±0.5      |                               |                                |                             |                |